


Rigging/ Bottle Screws


Meet IS : 3121-1981

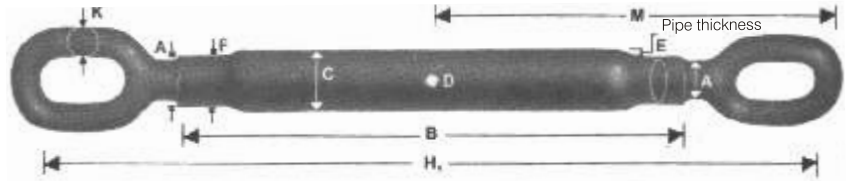

DIMENSIONS FOR TUBULAR BODIES AND SCREWED EYES

Nominal Size	Dia of Rope mm	H1		B	C Dia	D Dia	E	F Dia Min	K Dia	M	Proof Load kN	Safe Working Load kN
		Closed mm	Open mm									
M12	8	330	525	230	27	10	4	20	12	177	10.0	5.0
M16	10	370	550	230	27	10	4	22	12	197	18.0	9.0
M20	12	400	570	230	34	10	4	25	16	211	28.0	14.0
M24	14	475	700	300	34	12	5	32	16	246	36.0	18.0
M27	16	550	825	360	43	12	5.5	35	20	290	44.0	22.0
M30	18	550	825	360	43	14	5.5	38	20	290	63.0	31.5
M33	20	600	875	380	48	14	6.5	44	25	325	75.0	37.5
M36	22	600	875	380	60	16	6.5	47	25	325	86.0	43.0
M39	25	660	960	400	60	16	6.5	50	25	350	100.0	50.0
M45	29	700	960	400	76	19	6.5	60	28	378	112.0	56.0
M52	32	750	1000	400	76	19	8	70	36	406	144.0	72.0
M56	35	775	1025	400	83	19	8	73	36	421	194.0	97.0
M60	38	800	1050	500	90	20	9.5	76	40	440	214.0	107.0
M64	41	1070	1450	580	95	20	13	91	47	580	286.0	143.0
M68	44	1120	1590	620	103	20	14	96	51	635	342.0	171.0
M75	48	1270	1700	660	111	20	14	103	57	690	400.0	200.0
M80	51	1360	1760	700	119	20	15	112	63	740	500.0	250.0
M90	54	1440	1860	740	127	20	16	122	69	790	624.0	312.0

OTHER TYPES OF BOTTLE SCREWS

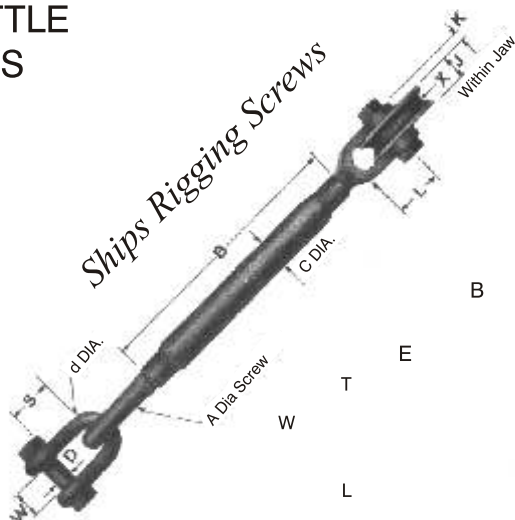

SLB 8 SLB 9 SLB 10 SLB 11 SLB 12

Refer IS : 6132 (Part II) 1972 for Dee Shackles

Refer IS : 2315 - 1978 for Solid Thimbles

Specifications given are indicative and are subject to change.