


## Eye & Eye Turnbuckle



### EYE & EYE

SL-226

Meets the requirements of Federal Specifications

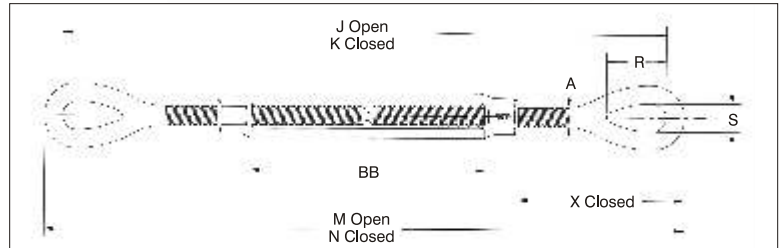

- Galvanized steel.
- End fittings are Quenched and Tempered, bodies heat treated by normalizing
- Turnbuckle eyes are forged and elongated, by design, to maximize easy attachment in system and minimize stress in the eye. For turnbuckle size 1/4" through 2 1/2" a shackle one size smaller can be reeved through eye.
- Modified BSW thread for improved fatigue properties.
- TURNBUCKLES RECOMMENDED FOR STRAIGHT OR IN-LINE PULL ONLY.
- Lock Nuts available for all sizes

Thread Diameter & Take Up		Working Load Limit* t	Weight Each (Kg)	Dimensions (mm)								
(in.)	(mm)			A	J Open	K Closed	M Open	N Closed	R	S	X Closed	BB
3/8 x 6	9.53 x 152	.54	.34	9.53	444	292	461	309	28.5	13.5	64.0	152
1/2 x 6	12.7 x 152	1.00	.73	12.7	485	332	507	355	36.6	18.3	82.0	152
5/8 x 9	15.9 x 229	1.59	1.42	15.9	677	449	703	475	44.5	22.2	99.1	229
5/8 x 12	15.9 x 305	1.59	1.59	15.9	830	525	856	551	44.5	22.2	99.1	305
3/4 x 12	19.1 x 305	2.36	2.46	19.1	873	569	905	600	53.0	25.4	119	305
3/4 x 18	19.1 x 457	2.36	3.29	19.1	1178	721	1210	752	54.0	25.4	119	457
7/8 x 12	22.2 x 305	3.27	3.67	22.2	897	592	935	630	60.5	31.8	130	305
7/8 x 18	22.2 x 457	3.27	4.51	22.2	1202	745	1240	783	60.5	31.8	130	457
1 x 12	25.4 x 305	4.54	5.41	25.4	964	660	1015	704	76.0	36.6	162	305
1 x 18	25.4 x 457	4.54	6.35	25.4	1269	812	1314	857	76.0	36.6	162	457
1 x 24	25.4 x 610	4.54	7.82	25.4	1574	965	1619	1009	76.0	36.6	162	610
1 1/4 x 18	31.8 x 457	6.89	10.4	31.8	1329	872	1386	929	90.5	46.0	196	457
1 1/4 x 24	31.8 x 610	6.89	12.3	31.8	1634	1024	1691	1081	90.5	46.0	196	610
1 1/2 x 18	38.1 x 457	9.71	14.1	38.1	1384	927	1448	991	103	54.0	219	457
1 1/2 x 24	38.1 x 610	9.71	17.0	38.1	1689	1080	1753	1143	103	54.0	219	610
1 3/4 x 18	44.5 x 457	12.70	23.8	44.5	1457	1000	1534	1077	117	60.5	254	457
1 3/4 x 24	44.5 x 610	12.70	26.3	44.5	1762	1153	1839	1229	117	60.5	254	610
2 x 24	51.0 x 610	16.78	38.7	51.0	1923	1313	2011	1402	146	68.5	333	610
2 1/2 x 24	63.5 x 610	26.22	65	63.5	1997	1387	2099	1489	165	79.5	350	610
2 3/4 x 24	70.0 x 610	34.02	88	70.0	2057	1448	2172	1562	178	82.5	387	610

\* Proof load is 2 times Working Load Limit. Ultimate Load is 5 times Working Load Limit.



SL-226  
Eye & Eye



SL-227  
Jaw & Eye



SL-228  
Jaw & Jaw

Specifications given are indicative and are subject to change.

All the requirements of Federal Specification