

I-Beam Clamps

Safe Working Load : 1000 - 20, 000 kgs.

I-Beam (Girder) Clamp can be fixed permanently as well as can be moved easily by unscrewing and screwing for use at the desired points. The clamp serves a variety of applications by quickly creating various stopper points for installing Cranes, Hoists, Chain Pulley Blocks, Deflection Pulleys, Sheave Blocks etc.

The spindle mechanism enables equal & opposite movement of Locking jaws. The clamp jaws are specially designed to secure firm seat on I-Beam flange.

IMPORTANT FEATURES :

- Lower construction height due to integrated traverse.
- Reduced Stress on I-Beam flange due to specially designed clamp jaws.
- Adjustable for a wide range of I-Beam widths & Profiles (INP, IPE & IPB)
- Strong Industrial Design.
- Clamp corresponds to standard specification for vertical load pick-up.
- Each equipment is serially numbered, tested by a competent authority 50% overload & is given Test Certificate.

I- BEAM CLAMPS (Model : SL- IBC)	
CAPACITY	FLANGE WIDTH
1	3" - 7"
2	3" - 7"
3	3" - 12"
5	4" - 13"
10	4" - 13"
15	5" - 16"
20	5" - 16"



Lifting Girders




Suspending Chain Pulley Blocks/Hoists



Pipe Lifting Clamp

PIPE LIFTING CLAMPS TEFLON PADS
 (Model : SL-PLC)

CAPACITY		Shackle size	Plate Size
EACH	PAIR		
1.5	3	16x19	16
2.5	5	16x19	25
4	8	19x22	28
5	10	19x22	32
7.5	15	25x28	35
10	20	28x32	45

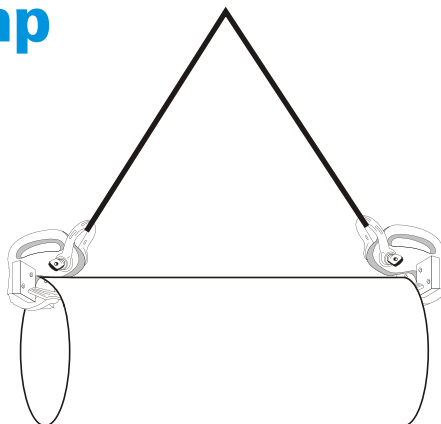

SL - PLC
 Pipe Lifting Clamps

5 Tons on pairs. Specially designed, rubber coated pipe lifting clamps with teflon coated jaw for pipe protection.