

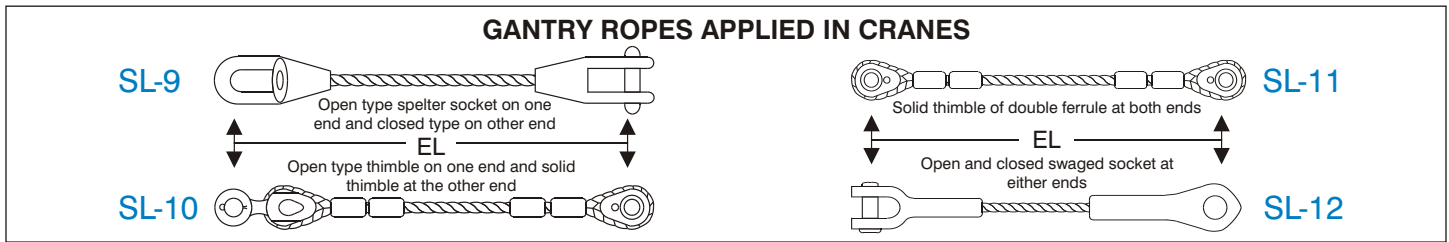
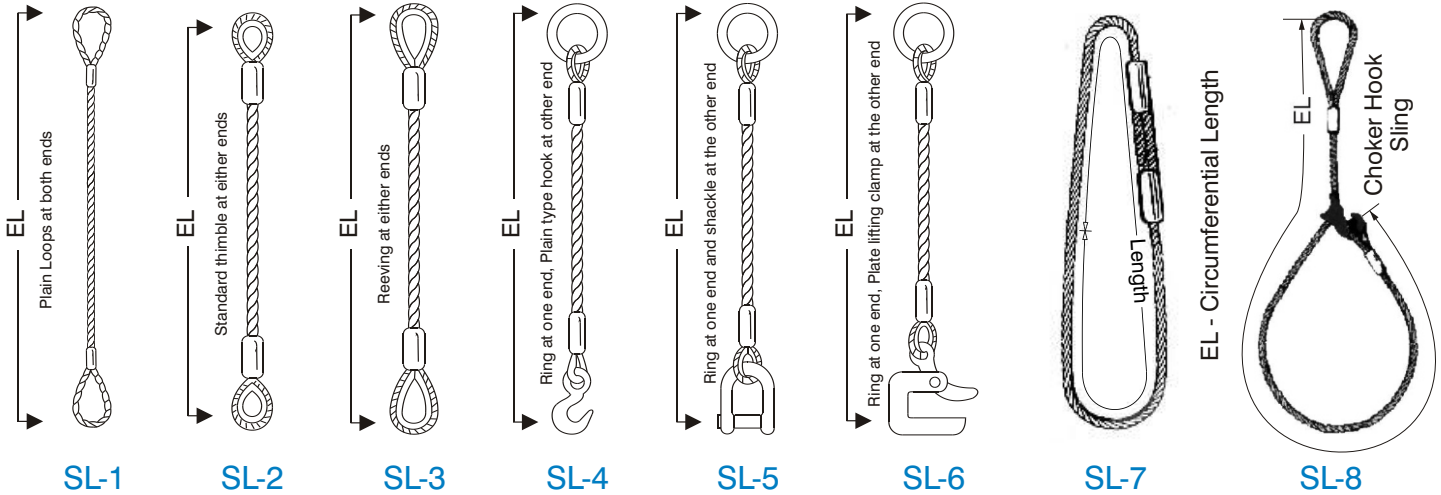


Single Part Slings

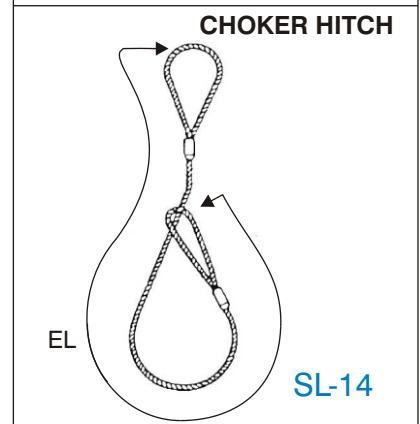

LOOP TYPE SINGLE PART SLINGS
 Max. Safe Working Load in Tons for 6 x 19, 6 x 36 Construction

Rope Dia. (mm)	Fibre Core			Steel Core		
	Vertical	Basket	Choker	Vertical	Basket	Choker
6	0.4	0.8	0.3	0.5	1.0	0.4
8	0.8	1.5	0.6	0.8	1.7	0.7
9	1.0	2.0	0.8	1.1	2.1	0.8
10	1.2	2.4	1.0	1.3	2.6	1.1
12	1.8	3.5	1.4	1.9	3.8	1.5
13	2.1	4.1	1.6	2.2	4.4	1.8
14	2.4	4.8	1.9	2.6	5.2	2.1
16	3.1	6.2	2.5	3.4	6.7	2.7
18	4.0	7.9	3.2	4.3	8.5	3.4
19	4.4	8.8	3.5	4.8	9.5	3.8
20	4.9	9.7	3.9	5.3	10.5	4.2
22	5.9	11.8	4.7	6.4	12.7	5.1
24	7.0	14.0	5.6	7.2	14.4	5.8
25	7.5	15.0	6.0	7.6	15.2	6.1
26	8.1	16.1	6.4	8.7	17.4	6.9
28	9.3	18.7	7.5	10.1	20.1	8.1
32	12.2	24.4	9.8	13.2	26.3	10.5
35	14.4	28.8	11.5	15.7	31.5	12.6
38	17.6	35.2	14.1	18.6	37.1	14.8
40	18.4	36.9	14.8	20.6	41.1	16.5
44	23.1	46.1	18.4	24.9	49.8	19.9
50	27.4	54.8	21.9	34.8	69.5	27.8
56	37.0	74.0	29.6	40.3	80.7	32.3
64	48.0	96.0	38.4	52.7	105.3	42.1
70	55.0	110.0	44.0	65.0	130.0	52.0

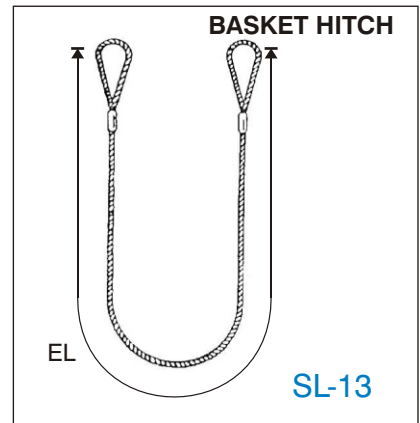

FACTOR OF SAFETY 5:1 TENSILE STRENGTH : 1770/1960 M/mm²

Note: The capacity indicated in the above table, for basket hitch and choker hitch is for guidance only, vertical column is the actual load the slings can be tested and certified in other words safe working load is applicable for vertical lift only.