


Short Lift Bottle Type Screw Jacks



SL

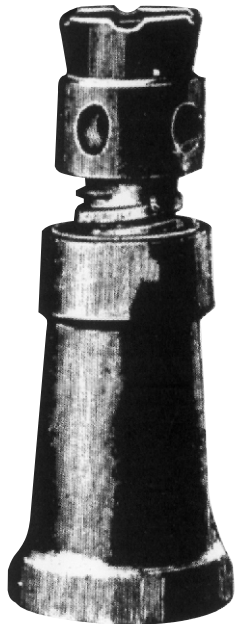

SLR

With Plain Four Way Head				With Ratchet Head			
Capacity Tons	Closed Height	Lift	Dia of Screw	Capacity Tons	Closed Height	Lift	Dia of Screw
2	254	152	35	-	-	-	-
3	254	152	41	-	-	-	-
5	254	152	48	5	267	152	51
10	305	152	60	10	318	152	60
15	318	152	64	15	356	152	64
20	432	178	70	20	432	178	70
25	457	178	76	25	452	178	76

All dimensions in mm

Short Lift Screw Jack is suitable for general engineering applications. Body made of heavy duty, graded cast iron, screw made of steel, threads are machine cut - square threads. The main screw and head are both tempered to avoid undue wear and tear in handling. The jack is available in both - Plain four way head (Tommy bar operated) and Ratchet head type. The jack head has quality finish and workmanship guaranteed against manufacturing defects and is designed to carry an overload of 25%.